

269A9261

KIT

## REVISIONS


SYM

DESCRIPTION

DATE

APP'D

PRODUCTION

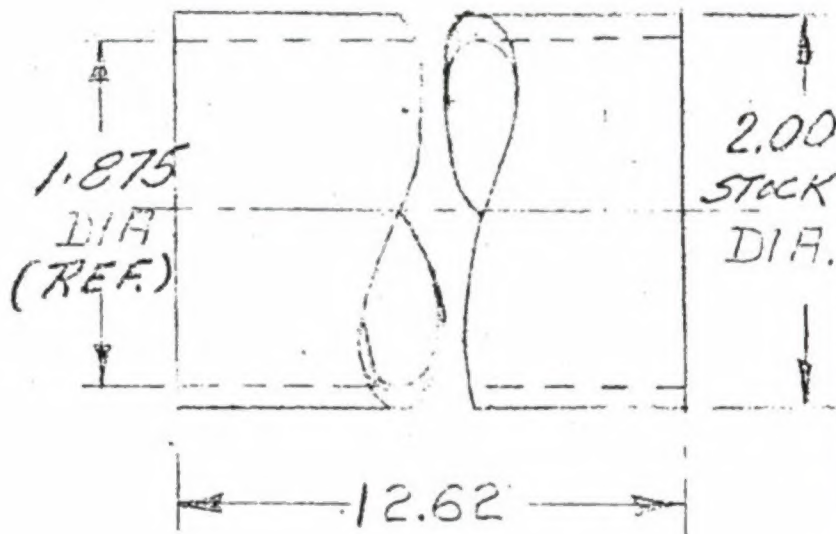

4. REMOVE BURRS

3. IDENTIFY PER HP 8-5 (INK STAMP)

2. PARCO-LUBRIZE PER HP 4-7A

1. ALL MACHINED SURFACES <sup>125</sup> FINISH

NOTES: UNLESS OTHERWISE SPECIFIED

SHOP COPY

OR EQUIV.

2.00 DIA X .062 WALL X 12 5/8 AISI 1080 STEEL TUBE COMM.

REQD	PART NO.	NAME	SIZE	DESCRIPTION	SPECIFICATION
UNLESS OTHERWISE SPECIFIED	DRWN	FRG-LON	7-26 62	SLEEVE -269A5050	HUGHES TOOL COMPANY
DIMENSIONAL TOLERANCES	CHK'D	Allen	10-3-6	-5 AND -8 CONE	AIRCRAFT DIVISION CULVER CITY, CALIFORNIA
3 PLACE DECIMAL $\pm .010$	APP'D	Karpman	7/17/64	INSTALL. TOOL	
2 PLACE DECIMAL $\pm .03$	APP'D	DiGeorge	7/15/64	(ARBOR PRESS)	
ANGULAR $\pm 0^{\circ}30'$	APP'D				
DIMENSIONS TO BE MET BEFORE PLATING.	APP'D				
CORNER RADIUS .062 ON C BORES AND SPOT FACES OF 1.250 DIA. OR LESS — .093 RADIUS ON GREATER THAN 1.250 DIA.	APP'D			SCALE FULL	269A9261
	APP'D				CODE 02731 SHEET 1 OF 1

